


Match Line (See Alternative 1 or 2)

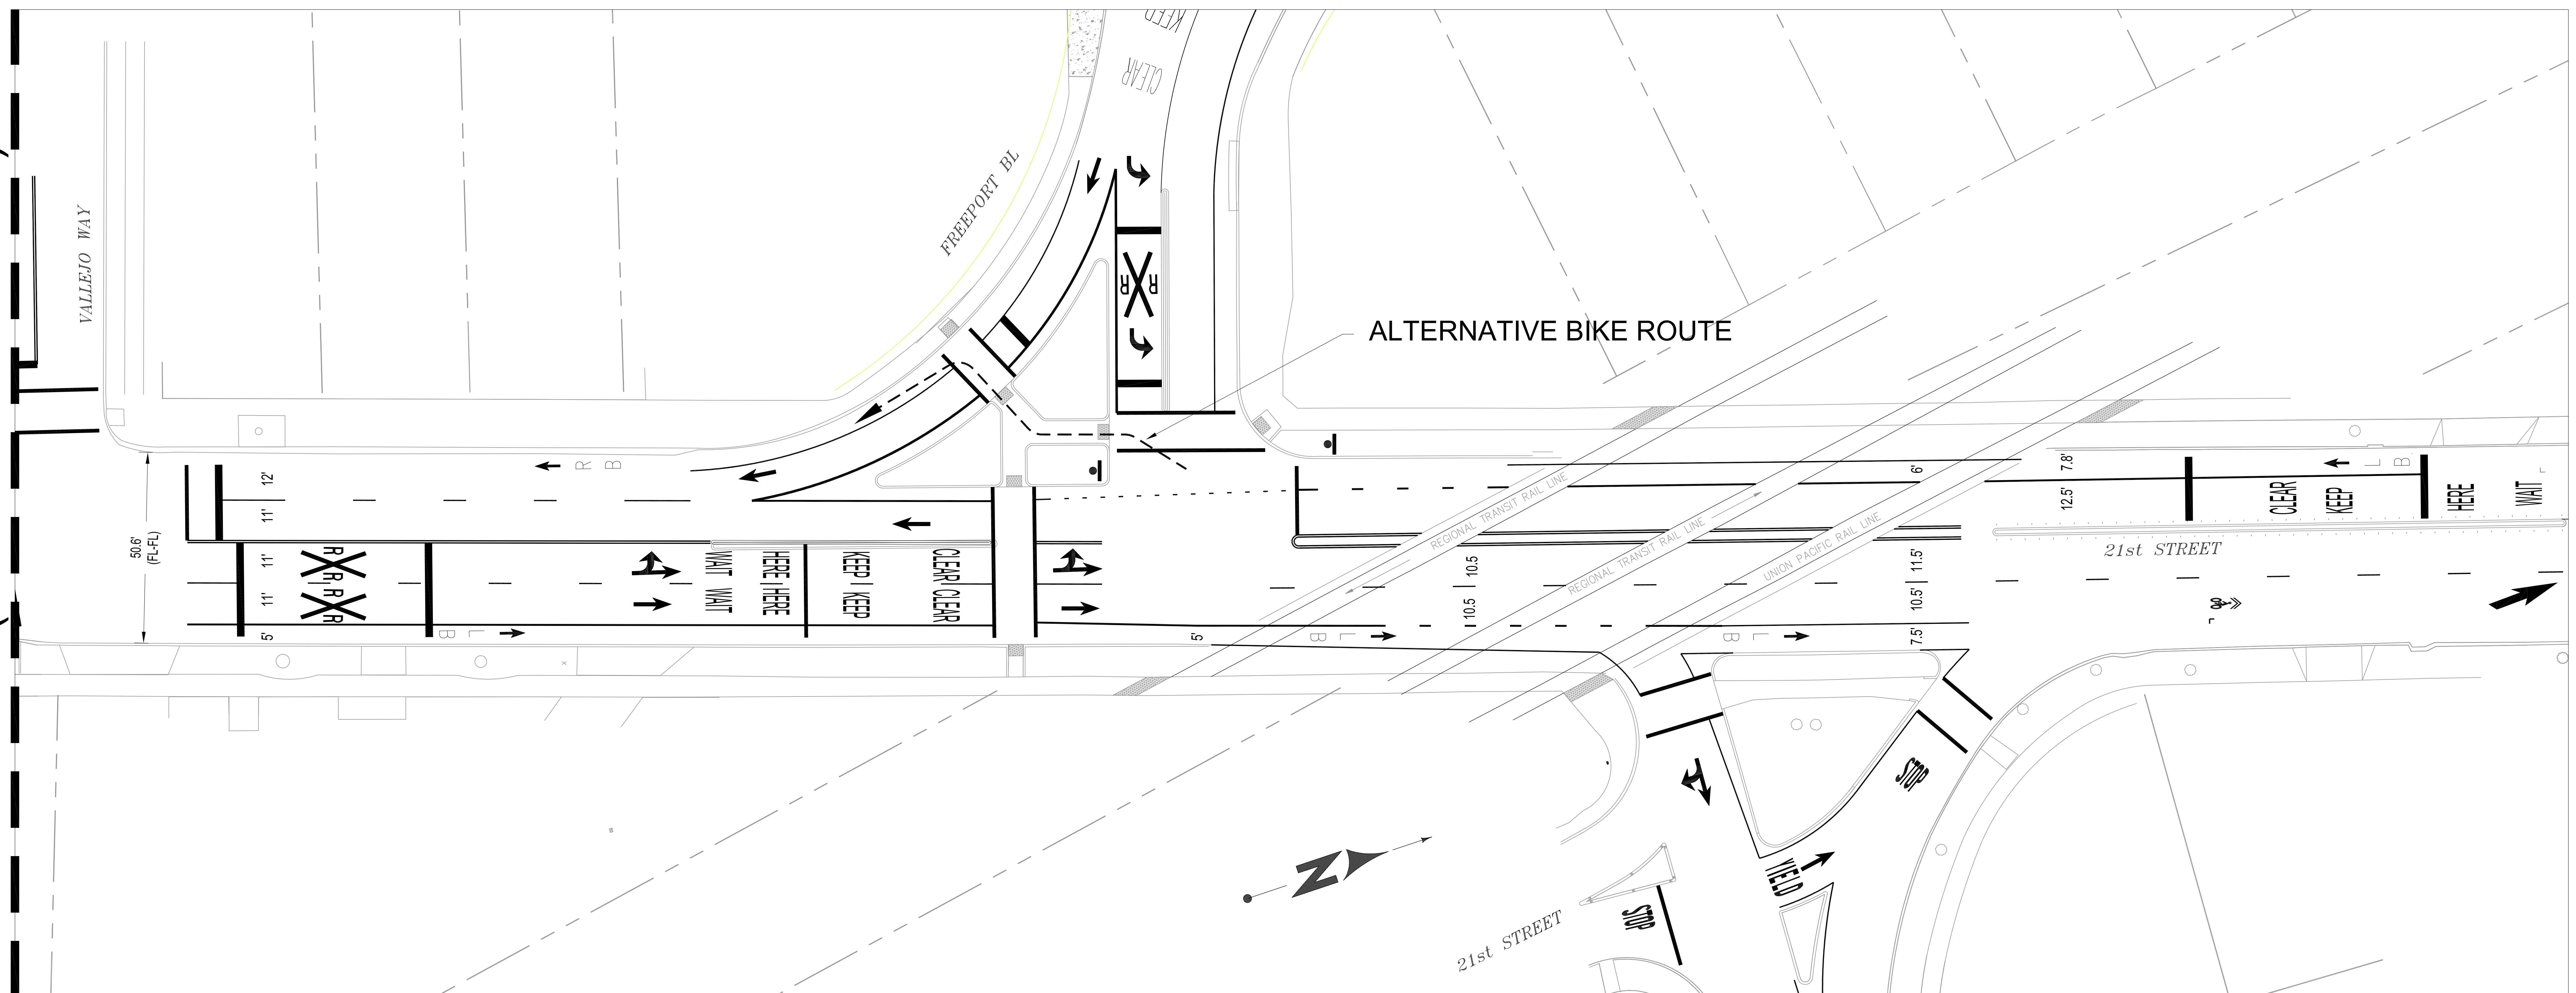

Option 1 (Signed Southbound Bike Route)

Roadway Changes

- Existing travel lane widths reduced
- Install northbound 5' bike lane
- Install southbound bike route
- Relocate channelizers on north side of tracks
- Provide additional signage

Positives

- Establishes northbound bike lane
- Establishes southbound bike route
- Maintains intersection capacity
- Provides alternative to cyclist to follow signage to use push button through planter area.

Considerations/Concerns

- PUC and approval of others
- Construction cost of island removal